


## TALSON GARMENT MAGNUM MINOR (TGM)

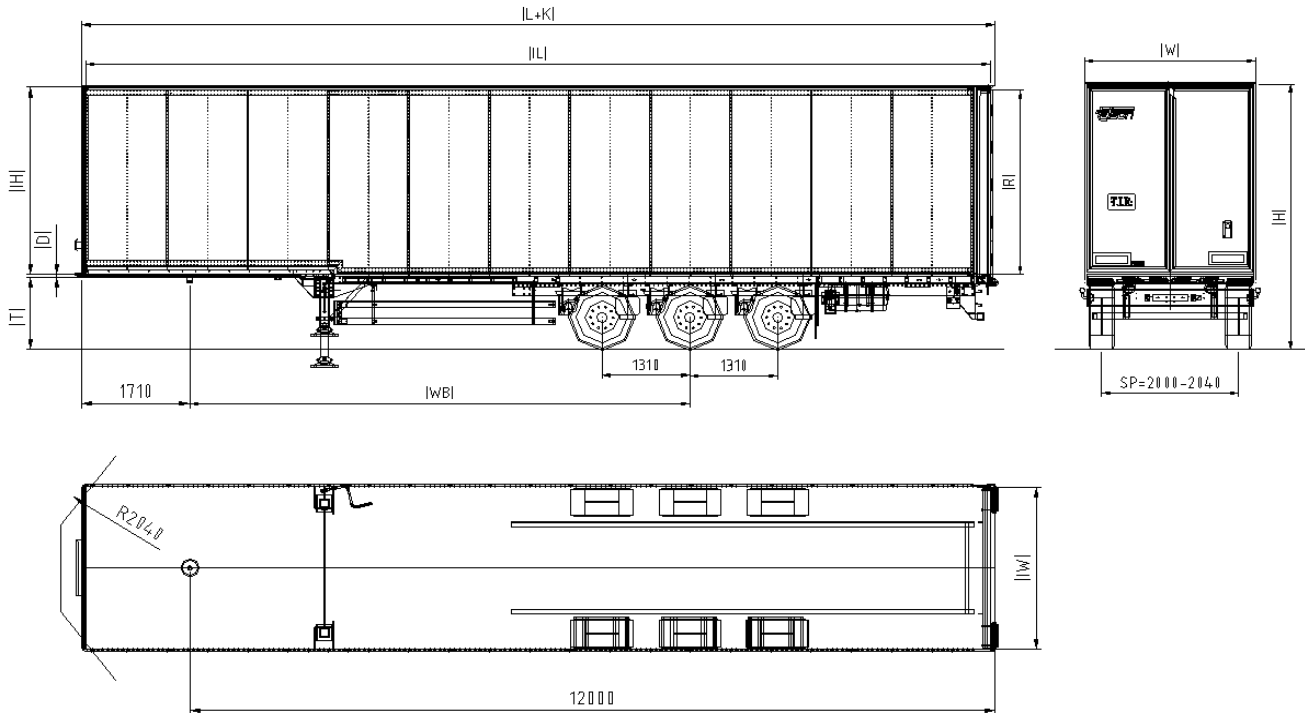

### DIMENSIONS

Total length external (L+K)	13.710 mm
Inner loading length (IL)	13.605 mm
Total external width (W)	2.550 mm
Inner loading width (IW)	2.472 mm
Wheel base (WB)	7.455 mm
Neck height (D)	52 mm
Permissible gross weight	39.000 kgs
Technical possible axle assembly load.	27.000 kgs
Technical possible fifth wheel load.	12.000 kgs
Overall height (H)	4.030 mm
Inner height (IH)	2.800 mm
5th wheel height (T)	1.150 mm
Rear loading height (R)	2.750 mm
Euro pallet capacity	34
Tare weight	7600 kgs

## TECHNICAL SPECIFICATION

Chassis	KTL coated and painted chassis, made of ST 355 high tension steel. consisting of 2 longitudinal beams in "C" form and crossmembers at needed distances.
Brake system	Wabco EBS 2S/2M double circuit brake system with RSS, spring-actuated parking brake in accordance with EC directive 71/320 EEC
Tyres	6 units 385/ 55- R22,5 tyres, steel rims for disc brake, Brand: Talson choice
Axle and suspension	BPW tri-axle pneumatic assembly with disc brakes and 9 tons capacity.
Liftaxle	Axle lifting drive automatically by EBS and extra button for traction control at rear end of the trailer.
Landing gear	Jost Modul 24 tons mechanical landing gear.
Electric system	24 Volt lighting installation with 2x7 + 15 pin plug socket, according to directive 75/756/EEC
Sidewall	Lighting Aspock, led markerlights, Europoint 2 on bumper. Inside walls finished with Talfix aluminium panels, kickingplate with height 300 mm/ 210 mm in front.
Floor	27 mm thick resine coated plywood floor, with steel protectionplate at entrance (600 mm)
Rear frame	Steel rear doorframe with 2 flat doors, 4 hinges and internal steel doorlockers. (Bordoor doors)
Front wall	Aluminium full rivited panel, plywood 18 mm inside, steel kicking plate 2.470x 500x4 mm
Roof	Sandwich panel with white prepainted aluminium sheet outside and polyester inside, 4 led lights with separate switch in lighting bar
Side underrun protection	According to directive 89/297/EEC, fold up type
Rear ramp buffer	Double roller ramp buffer with 4 rolls each side.
Mudguard	Anti spray according EEC directive
Toolbox	Plastic toolbox 600x400x500 mm
Rear bumper	Steel bumper according directive 70/221/EEC
Ferry rings	2x2 ferry rings standard.
Wheel chocks	2 plastic wheel chocks in holder
Lashing rings	2x13 lashing rings embedded in floor according DIN 75410
Reflectors	2x rear reflectors ECE R70, side walls white reflective strips, rear frame in red reflective strips.
Ladder	Entrance extendable ladder
Colors	Upperstructure is white RAL 9016, alu profiles anodised and chassis KTL coated and painted MB 7350

---

**TALSON TRAILERS B.V.**

Olivier van Noortweg 7, 5928 LX Venlo  
Postbus 3055, 5902 RB Venlo  
Tel: +31 (0)492-588600  
Fax: +31 (0)492-588609

KvK Eindhoven 50366823  
Btw nr: 822736421B01  
Rabobank Venlo e.o. 15.81.20.477  
BIC code: RABONL2U  
IBAN code: NL03RABO0158120477

---



---

**OPTIONS AND EXTRAS**

---

Sparewheel holder	Included
Sparewheel	Optional
COC for registration.	Included
Code XL certificate	Included